




Mode Y02P

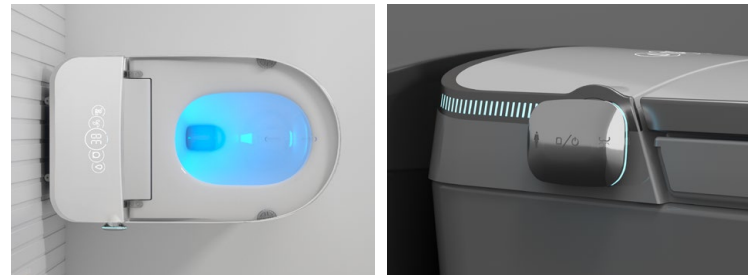

WHITE

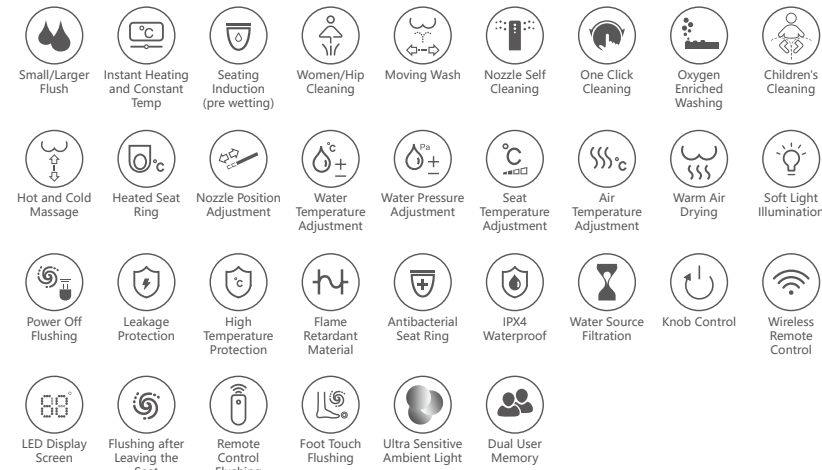

Dimension : L680xW410xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

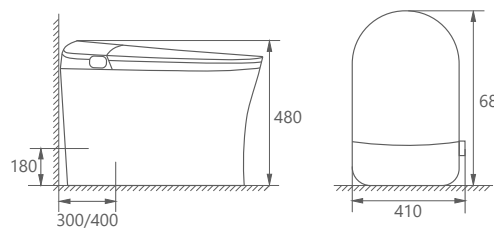

NO PRESSURE LIMIT UNAFFECTED BY LOW WATER PRESSURE IN HIGH-RISE BUILDINGS

The high strength and toughness of the pressurized water tank, when combined with the pressurized auxiliary impact force, result in the superposition of dual effects. This thereby forms two robust water flows, maximizing the flushing power. With a small amount of water, it can effectively remove dirt, eliminating the need for a second rinse. Even in tall buildings, the flushing power still remains outstanding.

● High-rise apartment




Low water pressure




Mode Y01P



WHITE

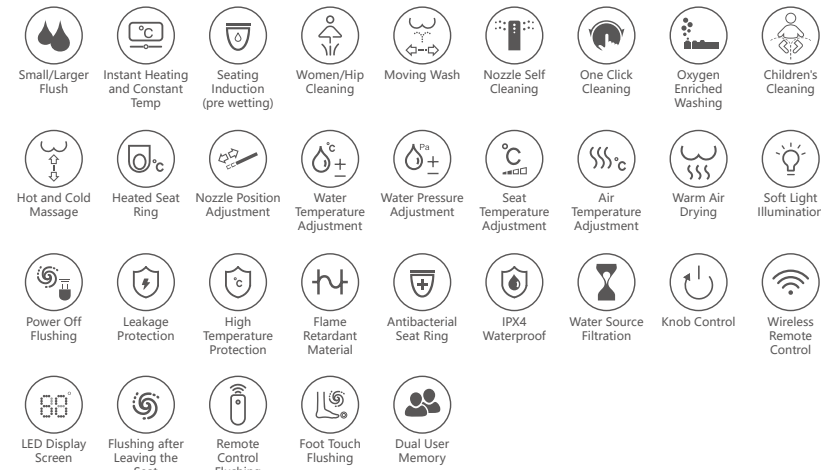


Dimension : L680xW410xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

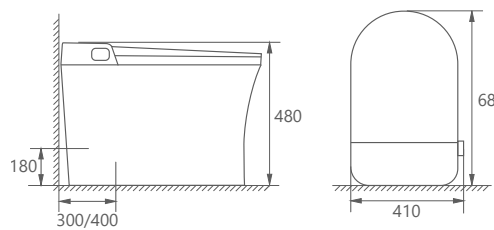


Mode Y07P



WHITE

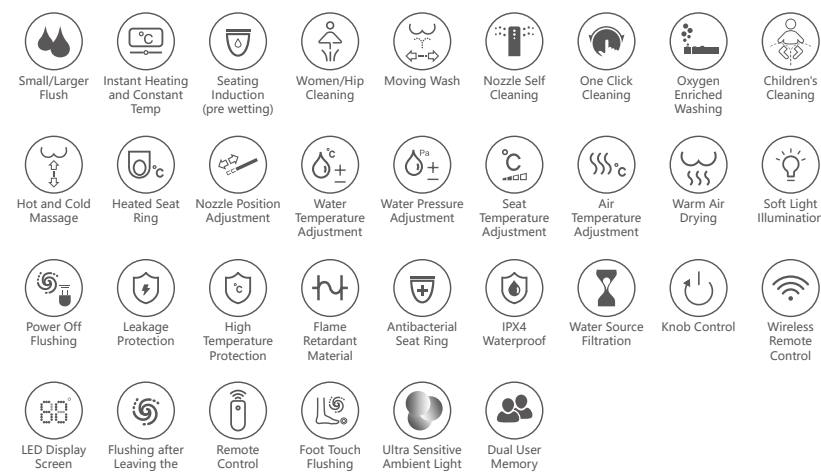

Dimension : L680xW410xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

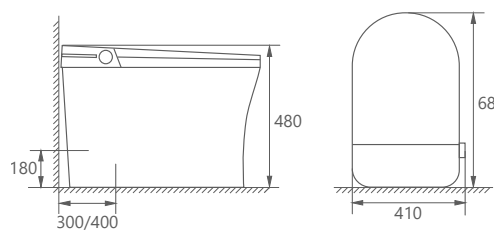

COVER OPENING Automatic opening

Approach to the toilet. It open seat cover automatically. It's cleaner and hygienic when you use it. The cover can be opened and closed freely.



Induction flushing
When passing its head/body bending just lift the leg, sensor can complete flushing



Off-seated flushing
After using, the human body leaves the seat and the toilet will flush automatically.



HELVETORA


SMART TOILET COLLECTION

*Open the door to the aesthetics of color
Customizable in multiple colors*



UV STERILIZATION

Dual-mode sterilization can effectively kill bacteria on nozzles and ceramics

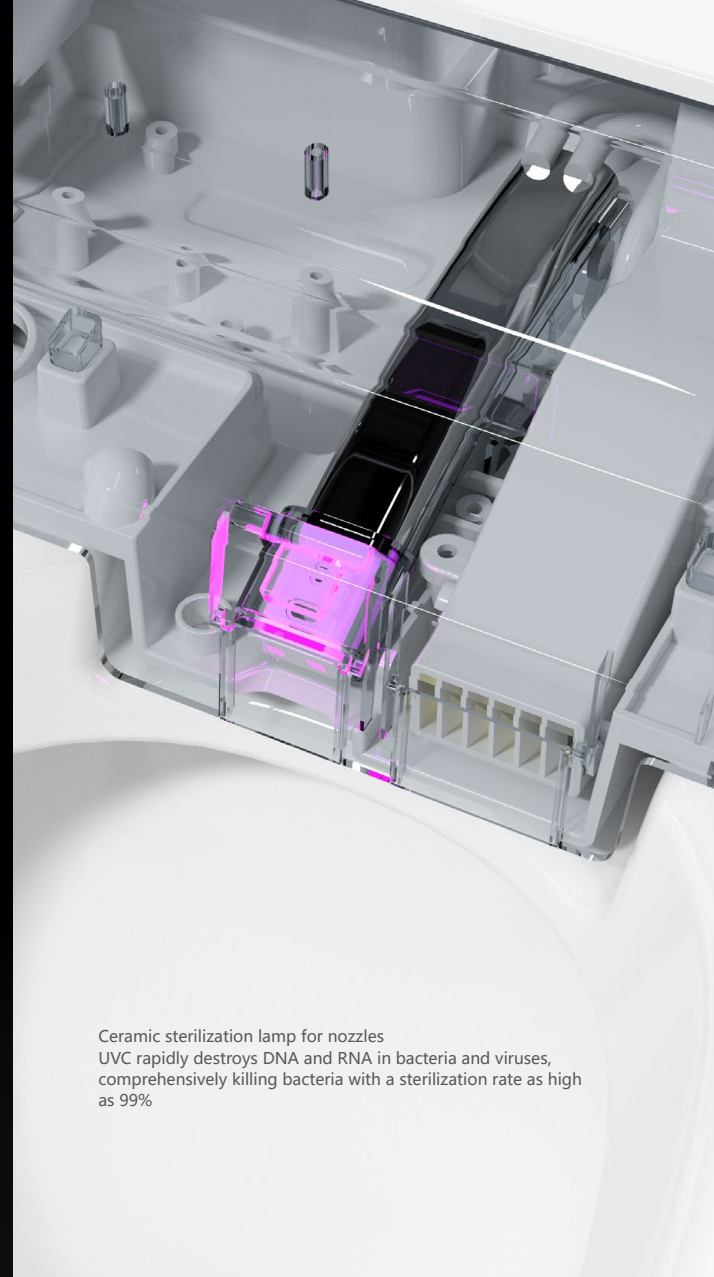


Ceramic sterilization lamp for nozzles
UVC rapidly destroys DNA and RNA in bacteria and viruses, comprehensively killing bacteria with a sterilization rate as high as 99%


Mode Y04P



SILVER WHITE

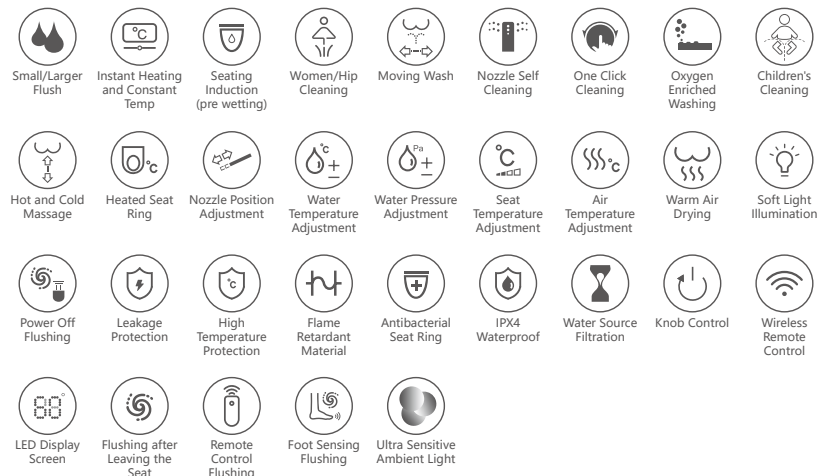



Dimension : L680xW400xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

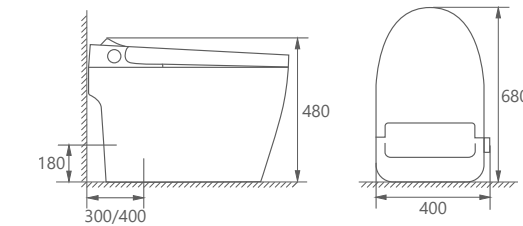


Mode Y03P



WHITE

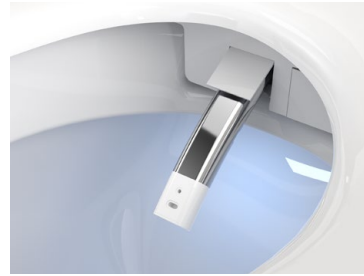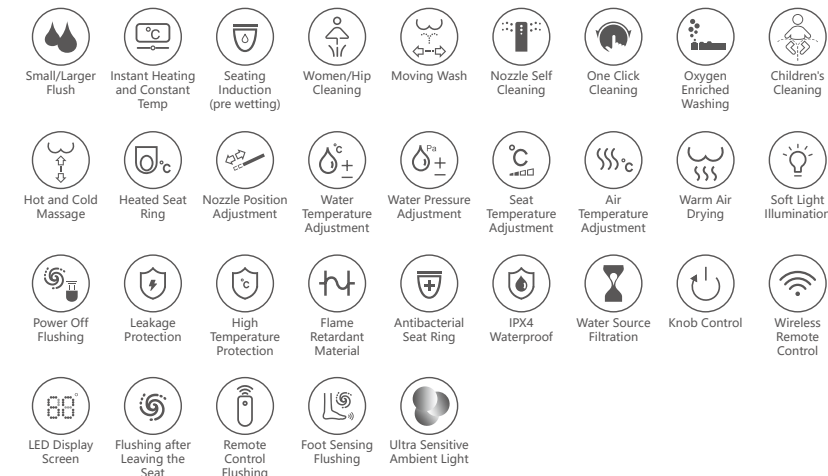


Dimension : L680xW390xH475mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

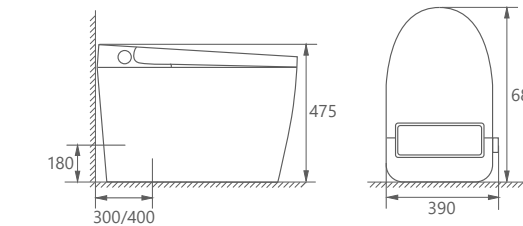


Mode Y13P



WHITE

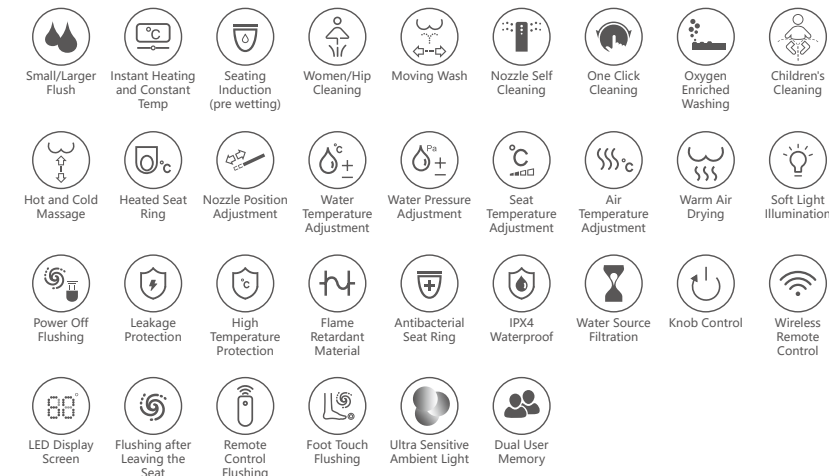


Dimension : L680xW410xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

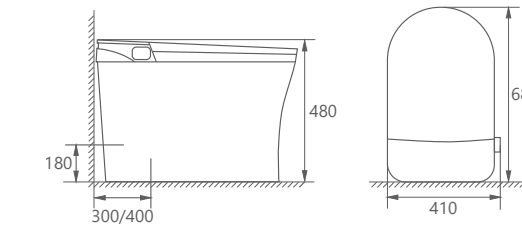


Mode Y10P



WHITE

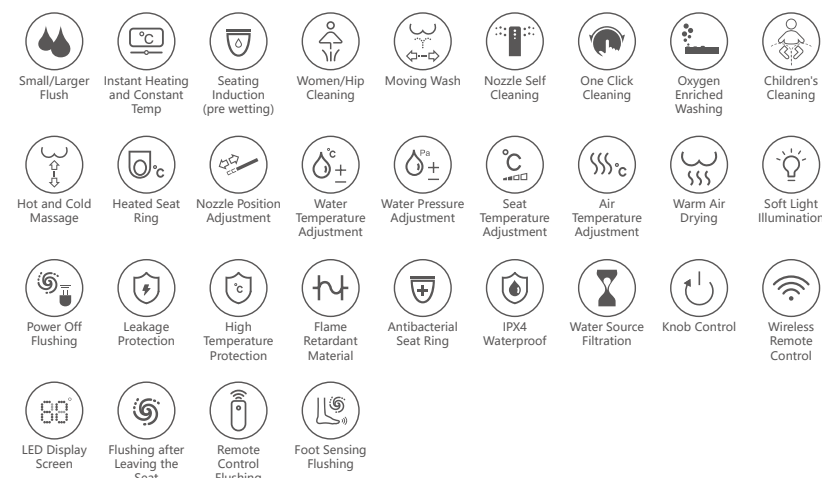



Dimension : L675xW390xH503mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

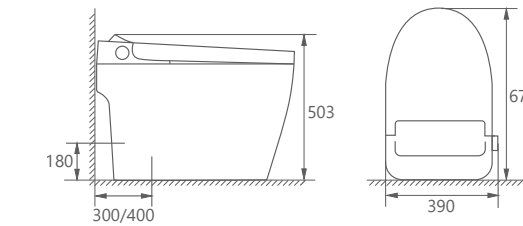


Mode Y11P



WHITE

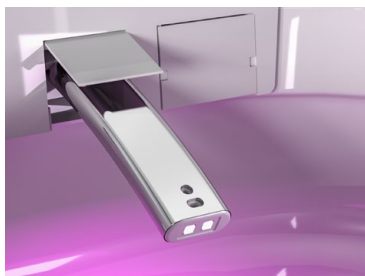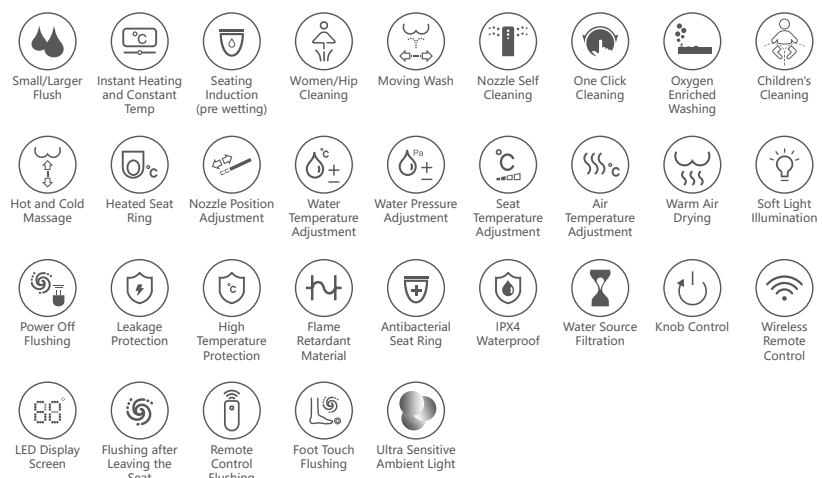


Dimension : L680xW400xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

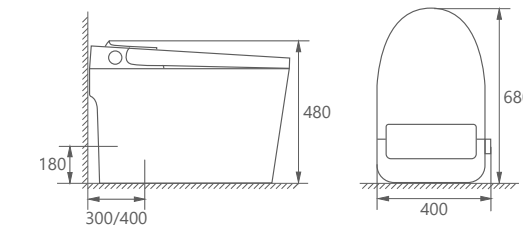


Mode Y12P



WHITE

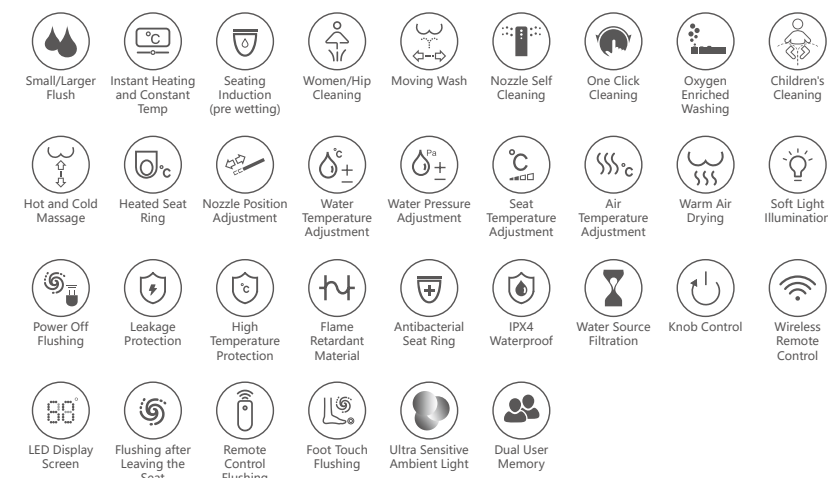


Dimension : L680xW410xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

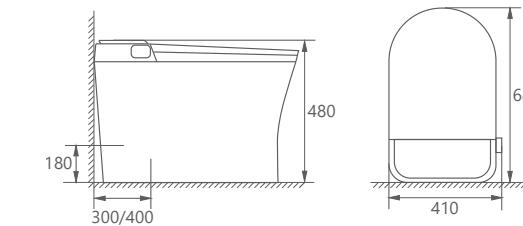

Mode Y06P



SILVER PLATING

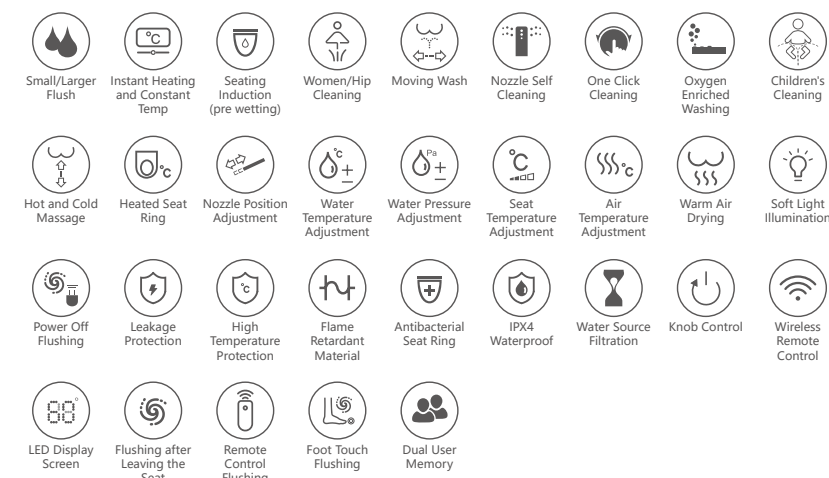

Dimension : L680xW410xH480mm
Rough-in : S-trap 300mm (200-450mm)
Rated voltage : 110V/220V
Heating mode : Instant heating
Flushing mode : Siphon, tornado flush
Water consumption : 4.8L
Floor standing toilet

